

产品规格书

建筑照明一体化系列

LR3735




LR3735



基本特征

- 35mm发光面，无边嵌入式安装，与建筑融为一体
- AL6063-T5 铝型材，高品质表面处理
- 间接出光，提供见光不见灯的装饰照明效果

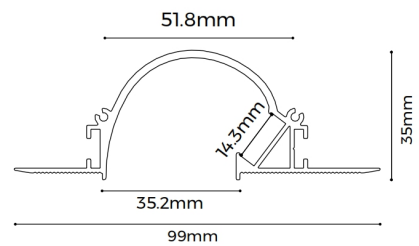

标配信息



图示	名称	参数
	型材	型材重量：2.25kg/2.5m 外型尺寸：L2500*W99*H35mm 材料：AL6063-T5 表面工艺：喷涂
	堵头	尺寸：L59.8*W35*H2mm 材质：AL

选配信息


图示	名称	参数
	软板模组 D8168-24V-10mm	材质：FPC，色温：1900/2300/2700/3000/3500/4000/5000/6000K；显指 > 90/>95；电压：24V；功率：16.2W/m；流明：1860Lm/m；板宽：10mm；最小裁剪单元：7LEDs/42mm；
	螺丝	尺寸：M3.5*40mm 材质：碳钢

光学参数

1M 灯具测试（配 D8S120-24V-12mm 光源）

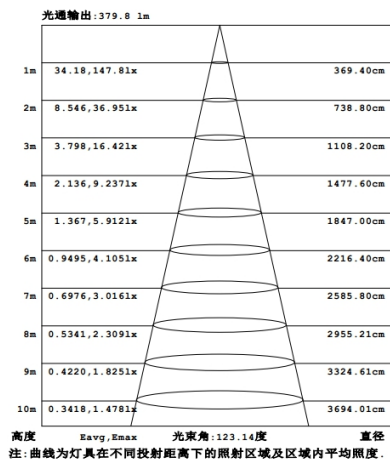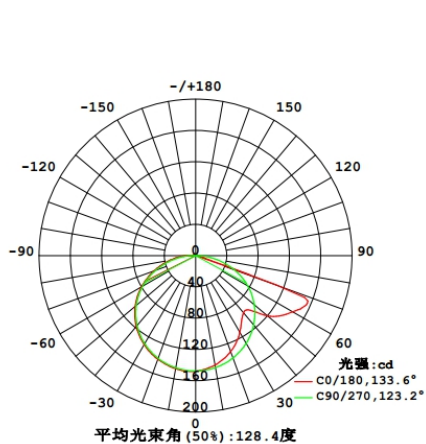

包装信息

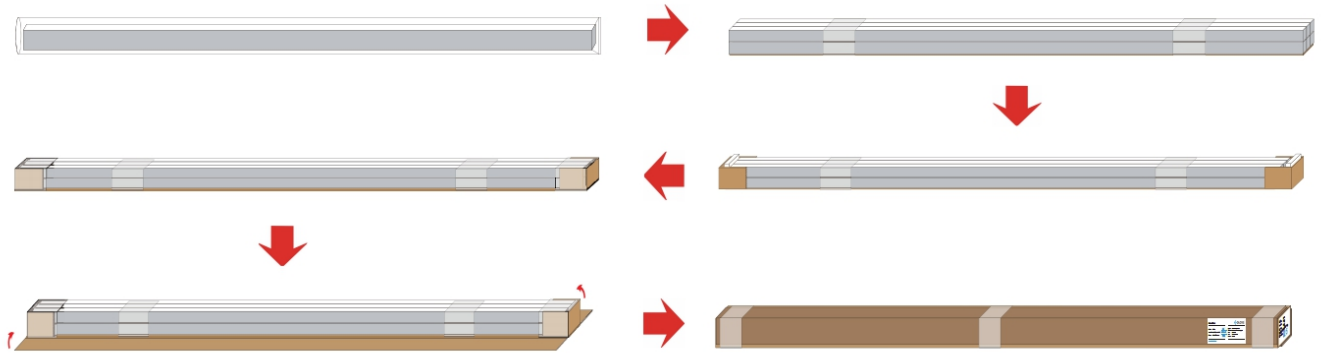

部件	包材类型	尺寸(mm)	净重(kg)	毛重(kg)	装箱数量
型材面罩组件	包装纸箱	2580*270*115mm	12.87	15.87	6pcs/box

